


DIN 172 A Bohrbüchsen

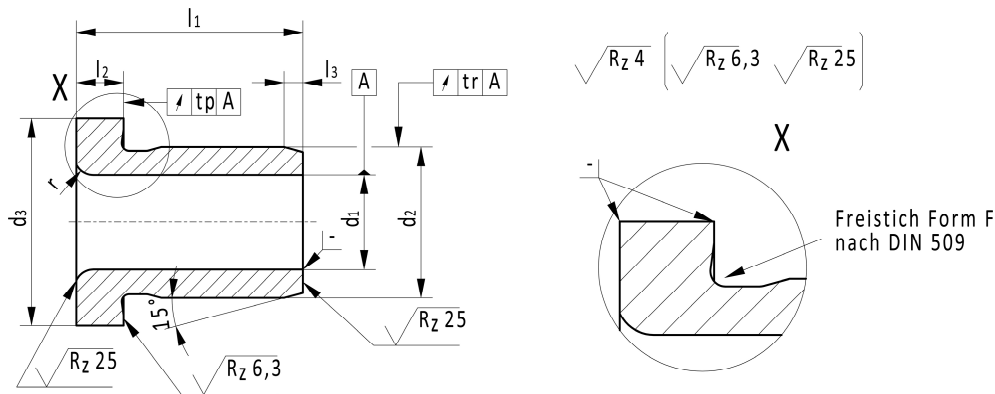

d ₁ - F7		Abstufung	l ₁			d ₂ n6	d ₃	l ₂	l ₃	r	tr	tp
über	bis		kurz	mittel	lang							
0,5	0,8	Bohrung d ₁ gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm Abstufungen in 0,01 mm Schritten auf Anfrage	6	9	-	3	6	2	1	1	0,01	0,03
0,8	1,0					4	7					
1,0	1,8					5	8					
1,8	2,6		8	12	16	6	9	2,5	1,25	1,5	0,02	
2,6	3,3					7	10					
3,3	4,0					8	11					
4,0	5,0		10	16	20	10	13	3	1,5	2	0,02	
5,0	6,0					12	15					
6,0	8,0					18	22					
8,0	10,0		12	20	25	22	26	4	1,5	2	0,02	
10,0	12,0					26	30					
12,0	15,0					30	34					
15,0	18,0		16	28	36	35	39	5	2,5	3	0,02	
18,0	22,0					42	46					
22,0	26,0					48	52					
26,0	30,0		20	36	45	55	59	6	2,5	3	0,02	
30,0	35,0					62	66					
35,0	42,0					70	74					
42,0	48,0		25	45	56	78	82	6	3	3,5	0,04	
48,0	55,0					85	90					
55,0	63,0	95				100						
63,0	70,0	30	56	67	105	110	6	3	4	0,04		
70,0	78,0				115	120						
78,0	85,0				125	130						
85,0	95,0	35	67	78	105	110	6	3	4	0,04		
95,0	105,0				115	120						
		40	78	105	115	120	6	3	4	0,04		
					125	130						
		45	89	112	115	120	6	3	4	0,04		
					125	130						

Werkstoff: 100 Cr6 oder ähnlich
 Härte: 740 + 80 HV (62 ±2 HRC) durchgehärtet
 Varianten: Form B / VSM
 Bestellbeispiel: DIN 172 A d₁ x l₁, DIN 172 A 8,5 x 12