
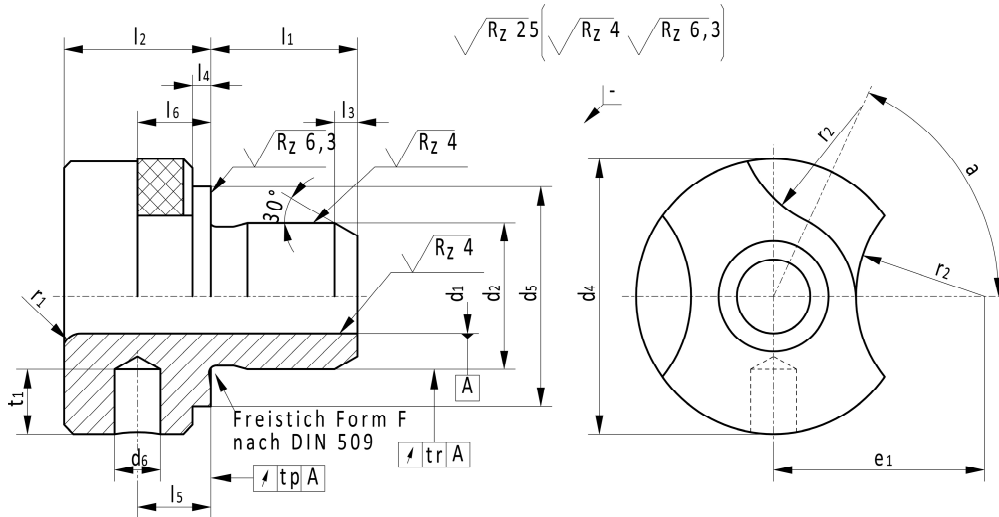


DIN 173 K/L Steckbohrbüchsen



d1 - F7		Abstufung	d2 m6	l1			d4	d5 0 -0,25	d6 H7	l2	l3
über	bis			kurz	mittel	lang					
1,0	4,0	Bohrung d1 gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm Abstufungen in 0,01 mm Schritten auf Anfrage	8	10	16	-	15	12	2,5	8	1,25
4,0	6,0		10	12	20	25	18	15			
6,0	8,0		12	16	28	36	22	18	3	10	1,5
8,0	10,0		15				26	22			
10,0	12,0		18				30	26			
12,0	15,0		22	20	36	45	34	30	5	12	2,5
15,0	18,0		26				39	35			
18,0	22,0		30				46	42			
22,0	26,0		35	25	45	56	52	46	6		
26,0	30,0		42	30	56	67	59	53			

d1 - F7		l4 0 -0,25	l5	l6 0 -0,2	e1	r1	r2 +0,5 -0,2	a	t1	tr	tp
über	bis										
1,0	4,0	1	4,25	3	11,5	1,5	7	65°	4	0,02	0,005
4,0	6,0				13,0						
6,0	8,0				16,5						
8,0	10,0		6	4	20,0	2	8,5	50°	5	0,02	0,005
10,0	12,0								6		
12,0	15,0								7		
15,0	18,0								7		
18,0	22,0		7	5,5	29,5	3	10,5	30°	8	0,04	0,008
22,0	26,0								9		
26,0	30,0								10		

Werkstoff: 100 Cr6 oder ähnlich
 Härte: 740 + 80 HV (62 ± 2 HRC) durchgehärtet
 Bestellbeispiel: DIN 173 K/L d1 x l1, DIN 173 K/L 8,0 x 20